

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 November 2003 (27.11.2003)

PCT

(10) International Publication Number
WO 03/097358 A1

(51) International Patent Classification⁷: **B41F 7/30, B05B 15/02, B41F 35/00**

(74) Agent: **STRÖM & GULLIKSSON INTELLECTUAL PROPERTY CONSULTING AB**; P O Box 4188, S-203 13 Malmö (SE).

(21) International Application Number: **PCT/SE03/00740**

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: **8 May 2003 (08.05.2003)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:
0201483-5 17 May 2002 (17.05.2002) **SE**

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **BALDWIN JIMEK AB** [SE/SE]; P.O. Box 14, S-232 01 Arlöv (SE).

(72) Inventors; and


(75) Inventors/Applicants (*for US only*): **HANSSON, Birger** [SE/SE]; Nils Pers väg 5, S-232 51 Åkarp (SE). **ARNDT, Peter** [SE/SE]; Kramersvägen 12, S-217 45 Malmö (SE).

Published:

— with international search report

[Continued on next page]

(54) Title: **A METHOD AND DEVICE FOR KEEPING A NUMBER OF SPRAY NOZZLES IN A PRINTING PRESS BEAM CLEAN**

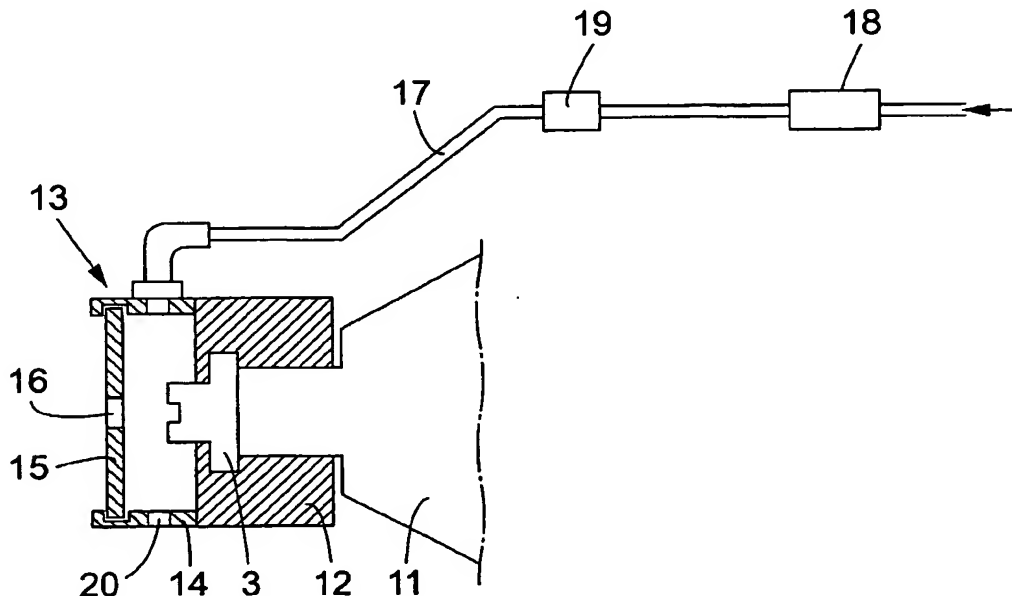

(57) Abstract: In order to keep a spray nozzle (3) in a printing press spray beam (1) clean, air with a certain overpressure is supplied to a cover (5; 13; 24) surrounding the spray nozzle (3), the spray cone from the spray nozzle leaving the cover undisturbed through a slot (7; 16; 26) therein .

WO 03/097358 A1